


# SDR Series Micrometer Adjustable Ratcheting Torque Wrench Specifications



[Click here to see metric dimensions.](#)

## SDR Fixed Ratchet Head - English (*Dimensions in English*)

Part Number	Model	Torque Range	Steps of Graduations	Square Drive (inches)	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810749	2 SDR 50I	10-50 in. lbs.	1 in. lb.	0.25	10.1	1.0	0.8	0.9	1.0
810750	2 SDR 150I	30-150 in. lbs.	2 in. lbs.	0.25	10.1	1.0	0.8	0.9	1.0
810751	3 SDR 150I	30-150 in. lbs.	2 in. lbs.	0.375	10.6	1.4	1.1	0.9	1.1
810761	3 SDR 200I	40-200 in. lbs.	2 in. lbs.	0.375	10.7	1.4	1.1	0.9	1.1
810748	3 SDR 600I	100-600 in. lbs.	5 in. lbs.	0.375	14.0	1.4	1.1	0.9	1.5
810752	3 SDR 750I	150-750 in. lbs.	5 in. lbs.	0.375	14.0	1.4	1.1	0.9	1.5
810756	3 SDR 75	15-75 ft. lbs.	0.5 ft. lb.	0.375	14.0	1.4	1.1	0.9	1.5
810747	3 SDR 1200I	200-1200 in. lbs.	10 in. lbs.	0.375	17.6	1.4	1.1	0.9	1.5
810754	3 SDR 100	20-100 ft. lbs.	1 ft. lb.	0.375	17.6	1.4	1.1	0.9	1.5
810755	4 SDR 1800I	300-1800 in. lbs.	10 in. lbs.	0.50	18.3	1.9	1.4	0.9	2.0
810757	4 SDR 150	30-150 ft. lbs.	1 ft. lb.	0.50	18.3	1.9	1.4	0.9	2.0
810758	4 SDR 250	50-250 ft. lbs.	2 ft. lbs.	0.50	24.3	1.9	1.4	1.1	3.5
810760	6 SDR 300	50-300 ft. lbs.	2.5 ft. lbs.	0.75	29.0	2.7	2.0	2.0	7.8
810597*	6 SDR 600	100-600 ft. lbs.	5 ft. lbs.	0.75	15.9	2.7	2.0	2.0	10.5
810525**	6 SDR 700	100-700 ft. lbs.	5 ft. lbs.	0.75	15.9	2.7	2.0	2.0	16.5

## SDR Fixed Ratchet Head - Newton Meter (*Dimensions in English*)

Part Number	Model	Torque Range	Steps of Graduations	Square Drive (inches)	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810774	2 SDR 6 Nm	1-6 Nm	0.1 Nm	0.25	10.1	1.0	0.8	0.9	1.0
810775	2 SDR 20 Nm	4-20 Nm	0.2 Nm	0.25	10.1	1.0	0.8	0.9	1.0
810776	3 SDR 20 Nm	4-20 Nm	0.2 Nm	0.375	10.6	1.4	1.1	0.9	1.1
810782	3 SDR 50 Nm	10-50 Nm	0.5 Nm	0.375	14.6	1.4	1.1	0.9	1.5
810777	3 SDR 100 Nm	20-100 Nm	0.5 Nm	0.375	14.6	1.4	1.1	0.9	1.5
810797	4 SDR 100 Nm	20-100 Nm	0.5 Nm	0.50	14.6	1.4	1.3	0.9	1.5
810783	3 SDR 140 Nm	28-140 Nm	1 Nm	0.375	17.9	1.4	1.3	0.9	1.5
810778	4 SDR 200 Nm	40-200 Nm	1 Nm	0.50	18.5	1.9	1.3	0.9	2.0
810779	4 SDR 300 Nm	60-300 Nm	2 Nm	0.50	24.3	1.9	1.3	1.1	3.5
810789	6 SDR 300 Nm	60-300 Nm	2 Nm	0.75	24.3	1.9	1.6	1.1	3.5
810598*	6 SDR 800 Nm	160-800 Nm	5 Nm	0.75	38.9	2.7	2.0	2.0	10.5

## SDR Fixed Ratchet Head - English *(Dimensions in metric)*

Part Number	Model	Torque Range	Steps of Graduations	Square Drive (inches)	A (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
810749	2 SDR 50I	10-50 in. lbs.	1 in. lb.	0.25	257	25	21	24	0.5
810750	2 SDR 150I	30-150 in. lbs.	2 in. lbs.	0.25	257	25	21	24	0.5
810751	3 SDR 150I	30-150 in. lbs.	2 in. lbs.	0.375	270	35	29	24	0.5
810761	3 SDR 200I	40-200 in. lbs.	2 in. lbs.	0.375	271	35	29	24	0.5
810748	3 SDR 600I	100-600 in. lbs.	5 in. lbs.	0.375	356	35	29	24	0.7
810752	3 SDR 750I	150-750 in. lbs.	5 in. lbs.	0.375	356	35	29	24	0.7
810756	3 SDR 75	15-75 ft. lbs.	0.5 ft. lb.	0.375	356	35	29	24	0.7
810747	3 SDR 1200I	200-1200 in. lbs.	10 in. lbs.	0.375	448	35	29	24	0.7
810754	3 SDR 100	20-100 ft. lbs.	1 ft. lb.	0.375	448	35	29	24	0.7
810755	4 SDR 1800I	300-1800 in. lbs.	10 in. lbs.	0.50	465	49	37	24	0.9
810757	4 SDR 150	30-150 ft. lbs.	1 ft. lb.	0.50	465	49	37	24	0.9
810758	4 SDR 250	50-250 ft. lbs.	2 ft. lbs.	0.50	616	49	37	27	1.6
810760	6 SDR 300	50-300 ft. lbs.	2.5 ft. lbs.	0.75	737	68	51	51	3.5
810597	6 SDR 600*	100-600 ft. lbs.	5 ft. lbs.	0.75	405	68	51	51	4.8
810525	6 SDR 700**	100-700 ft. lbs.	5 ft. lbs.	0.75	405	68	51	51	7.5

## SDR Fixed Ratchet Head - Newton Meter *(Dimensions in metric)*

Part Number	Model	Torque Range	Steps of Graduations	Square Drive (inches)	A (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
810774	2 SDR 6 Nm	1-6 Nm	0.1 Nm	0.25	257	25	21	24	0.5
810775	2 SDR 20 Nm	4-20 Nm	0.2 Nm	0.25	257	25	21	24	0.5
810776	3 SDR 20 Nm	4-20 Nm	0.2 Nm	0.375	270	35	29	24	0.5
810782	3 SDR 50 Nm	10-50 Nm	0.5 Nm	0.375	371	35	29	24	0.7
810777	3 SDR 100 Nm	20-100 Nm	0.5 Nm	0.375	371	35	29	24	0.7
810797	4 SDR 100 Nm	20-100 Nm	0.5 Nm	0.50	371	35	32	24	0.7
810783	3 SDR 140 Nm	28-140 Nm	1 Nm	0.375	456	35	32	24	0.7
810778	4 SDR 200 Nm	40-200 Nm	1 Nm	0.50	470	49	33	24	0.9
810779	4 SDR 300 Nm	60-300 Nm	2 Nm	0.50	618	49	33	27	1.6
810789	6 SDR 300 Nm	60-300 Nm	2 Nm	0.75	618	49	41	27	1.6
810598*	6 SDR 800 Nm	160-800 Nm	5 Nm	0.75	989	68	51	51	4.8


\* Extension handle available.

\*\* Extension handle included.

# CCM Series Micrometer Adjustable Interchangeable Head Torque Wrench Specifications

*The Ultimate in Versatility!*

[Click here to see metric dimensions.](#)

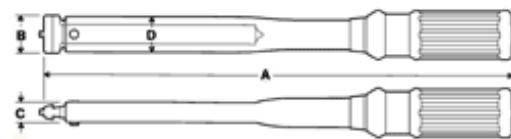

To see S/R Interchangeable Head selection, [click here!](#)

## CCM Micrometer Adjustable Interchangeable Head - English (Dimensions in English)

Part Number	Model	Torque Range	Steps of Graduations	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810769	CCM 50I	10-50 in. lbs.	1 in. lb.	9	0.8	0.5	0.9	0.5
810765	CCM 150I	30-150 in. lbs.	2 in. lbs.	9	0.8	0.5	0.9	0.5
810763	CCM 600I	100-600 in. lbs.	5 in. lbs.	12.75	1	0.5	0.9	1
810766	CCM 750I	150-750 in. lbs.	5 in. lbs.	12.75	1	0.5	0.9	1
810770	CCM 75	15-75 ft. lbs.	0.5 ft. lb.	12.75	1	0.5	0.9	1
810764	CCM 1200I	200-1200 in. lbs.	10 in. lbs.	16	1.1	0.5	0.9	1.1
810762	CCM 1800I	300-1800 in. lbs.	10 in. lbs.	16	1.1	0.5	0.9	1.3
810771	CCM 150	30-150 ft. lbs.	1 ft. lb.	16	1.1	0.5	0.9	1.3
810335	CCM 300*	50-300 ft. lbs.	2.5 ft. lbs.	26	1.8	0.6	2.0	6.5
810772	CCM 400*	50-400 ft. lbs.	5 ft. lbs.	35.938	1.8	0.6	2.0	8.3

\*Wrenches calibrated for use with heads having 3.875" common centerline.

## CCM Micrometer Adjustable Interchangeable Head - Newton Meter (Dimensions in English)

Part Number	Model	Torque Range	Steps of Graduations	A (in.)	B (in.)	C (in.)	D (in.)	Weight (lbs.)
810784	CCM 6 Nm	1-6 Nm	0.1 Nm	9.0	0.8	0.5	0.9	0.5
810785	CCM 20 Nm	4-20 Nm	0.2 Nm	9.0	0.8	0.5	0.9	0.5
810786	CCM 100 Nm	20-100 Nm	0.5 Nm	12.9	1.0	0.5	0.9	1
810787	CCM 200 Nm	40-200 Nm	1 Nm	16.3	1.1	0.5	0.9	1.3
810788	CCM 400 Nm*	75-400 Nm	2.5 Nm	26.0	1.8	0.6	2.0	6.5
810794	CCM 600 Nm*	100-600 Nm	5 Nm	35.9	1.8	0.6	2.0	8.3

\*Wrenches calibrated for use with heads having 3.875" common centerline.

## CCM Micrometer Adjustable Interchangeable Head - English (Dimensions in metric)

Part Number	Model	Torque Range	Steps of Graduations	A (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
810769	CCM 50 I	10-50 in. lbs.	1 in. lb.	229	19	13	24	0.2

810765	CCM 150I	30-150 in. lbs.	2 in. lbs.	229	19	13	24	0.2
810763	CCM 600I	100-600 in. lbs.	5 in. lbs.	324	25	13	24	0.5
810766	CCM 750I	150-750 in. lbs.	5 in. lbs.	324	25	13	24	0.5
810770	CCM 75	15-75 ft. lbs.	0.5 ft. lb.	324	25	13	24	0.5
810764	CCM 1200I	200-1200 in. lbs.	10 in. lbs.	406	28	13	24	0.5
810762	CCM 1800I	300-1800 in. lbs.	10 in. lbs.	406	28	13	24	0.6
810771	CCM 150	30-150 ft. lbs.	1 ft. lb.	406	28	13	24	0.6
810335	CCM 300*	50-300 ft. lbs.	2.5 ft. lbs.	660	46	15	51	3.0
810772	CCM 400*	50-400 ft. lbs.	5 ft. lbs.	913	46	15	51	3.8

\*Wrenches calibrated for use with heads having 3.875" common centerline.

## CCM Micrometer Adjustable Interchangeable Head - Newton Meter

*(Dimensions in English)*

Part Number	Model	Torque Range	Steps of Graduations	A (mm)	B (mm)	C (mm)	D (mm)	Weight (kg)
810784	CCM 6 Nm	1-6 Nm	0.1 Nm	229	19	13	24	0.2
810785	CCM 20 Nm	4-20 Nm	0.2 Nm	229	19	13	24	0.2
810786	CCM 100 Nm	20-100 Nm	0.5 Nm	329	25	13	24	0.5
810787	CCM 200 Nm	40-200 Nm	1 Nm	413	29	13	24	0.6
810788	CCM 400 Nm*	75-400 Nm	2.5 Nm	660	44	15	51	3.0
810794	CCM 600 Nm*	100-600 Nm	5 Nm	913	44	15	51	3.8

\*Wrenches calibrated for use with heads having 3.875" common centerline.