

# 3" (76 mm) Diameter Extension Model

**NEW!**

## Model 52537

1 hp, 18,000 RPM, Straight-Line, Rear Exhaust


- For use with optional 3" (76 mm) diameter Diamond Cut-Off Wheels.
- Vacuum shroud diverts airborne dust and debris, through 1" (25 mm) outside diameter port to optional external vacuum source.
- Vacuum shroud cover may also be used as a trim guide, for cutting as close as 5/32" (4 mm).
- Extension design is ideal for two-hand use, offering enhanced comfort and control.
- Blade guide allows exposure of 9/16" (14 mm) depth of Cut-Off Wheel.
- Cut-Off Wheel is changed quickly and easily, without removal of shroud cover plate.
- Safety-lock throttle lever is included.



**The ONLY Extension Vacuum Cut-Off Wheel Tool on the Market!**



◀ Vacuum shroud cover may be used as a trim guide, for cutting as close as 5/32" (4 mm).

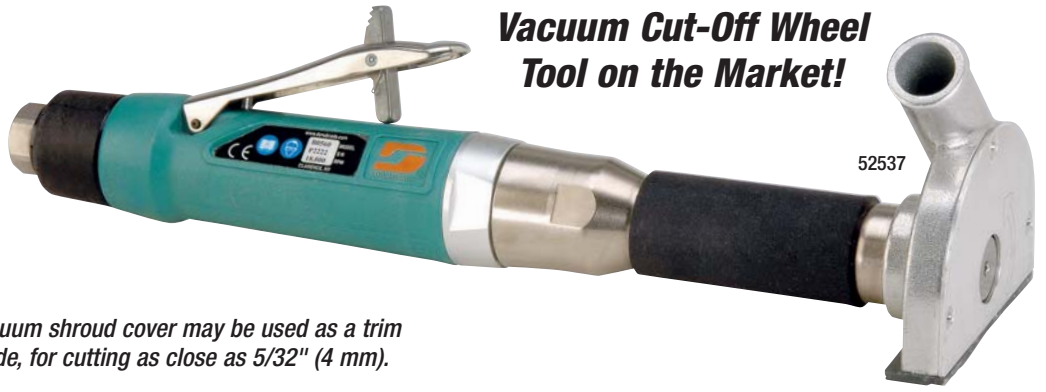

**Important:** Speed of tool must not exceed maximum operating speed of accessory. Never mount bonded grinding wheels. Always wear eye, face & body protection.

Model Number	Motor hp (W)	Motor RPM	Maximum Air Flow SCFM (LPM)	Hose I.D. Size Inch (mm)	Air Inlet Thread	Spindle Thread	Weight Pound (kg)	Length Inch (mm)	Height Inch (mm)
52538	.4 (298)	12,000	21 (595)	3/8 (10)	1/4" NPT	3/8"-24 Male	2 (.97)	8-5/8 (219)	4-3/8 (111)
52537	1 (746)	18,000	41 (1,161)	3/8 (10)	3/8" NPT	3/8"-24 Male	3.75 (1.7)	14-5/8 (371)	4-1/2 (114)

Additional Specifications: Air Pressure 90 PSIG (6.2 Bar)